


INDUSTRIAL PROCESS PUMPS

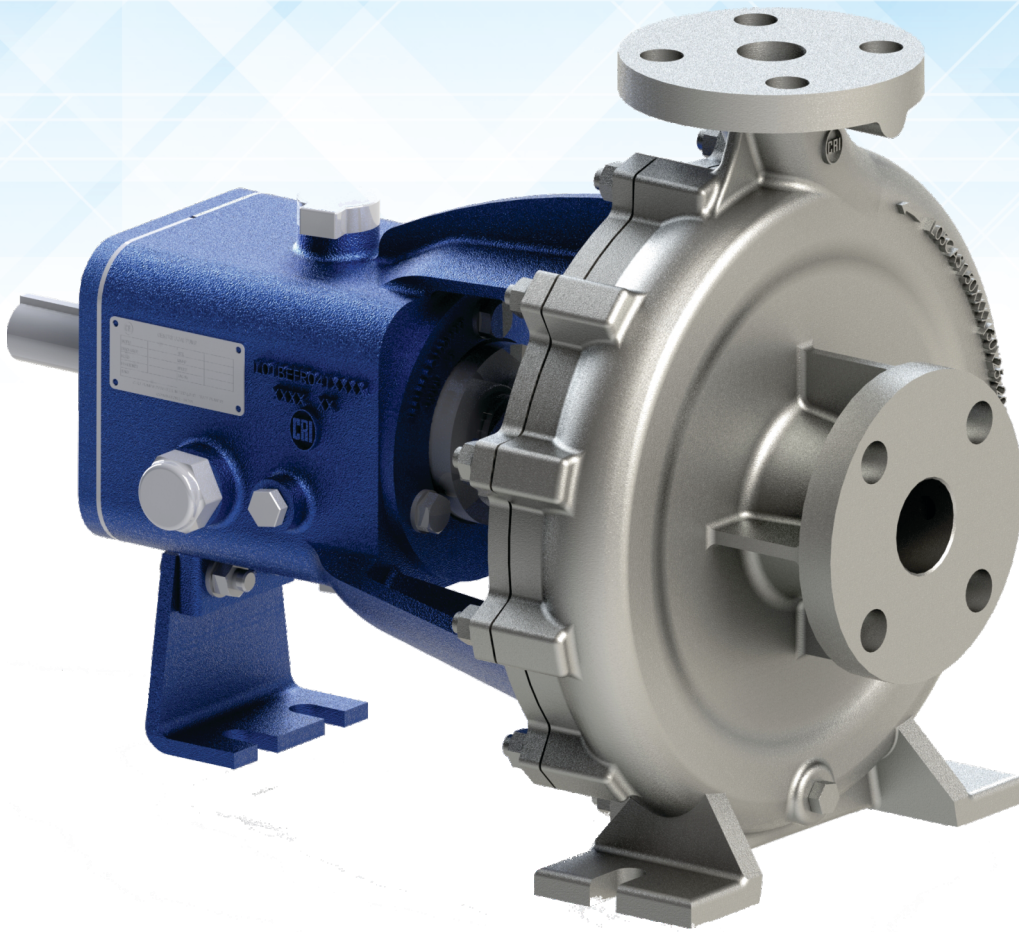

SPECIAL FEATURES

- Especially for low flow applications
- Semi Open Impeller threaded to shaft
- Common Seal housing for Gland Packing & Mechanical Seal
- Flange confirms to ANSI B 16.5 Class 150
- Back Pull Out Design
- Oil lubrication- Oil Bath Method
- Integrated bearing frame

APPLICATIONS

- Pharmaceuticals
- Sewage Treatment Plants
- Evaporator
- Food Industries
- Textile Industries
- Chemical Industries

OPERATING DATA

| | |
|------------------|--------------------------|
| Head | - Up to 65m |
| Capacity | - 155 m ³ /hr |
| Speed | - 1450 / 2900 rpm |
| Working Pressure | - Upto 10 Bar |
| Temperature | - -20° C to 120° C |
| Solid Size | - Up to 6 mm |



MATERIAL OF CONSTRUCTION

Hydraulic portions – SS 316 & SS 304.

Non-Hydraulic portions – CI

Other Materials on Request

PERFORMANCE CURVES

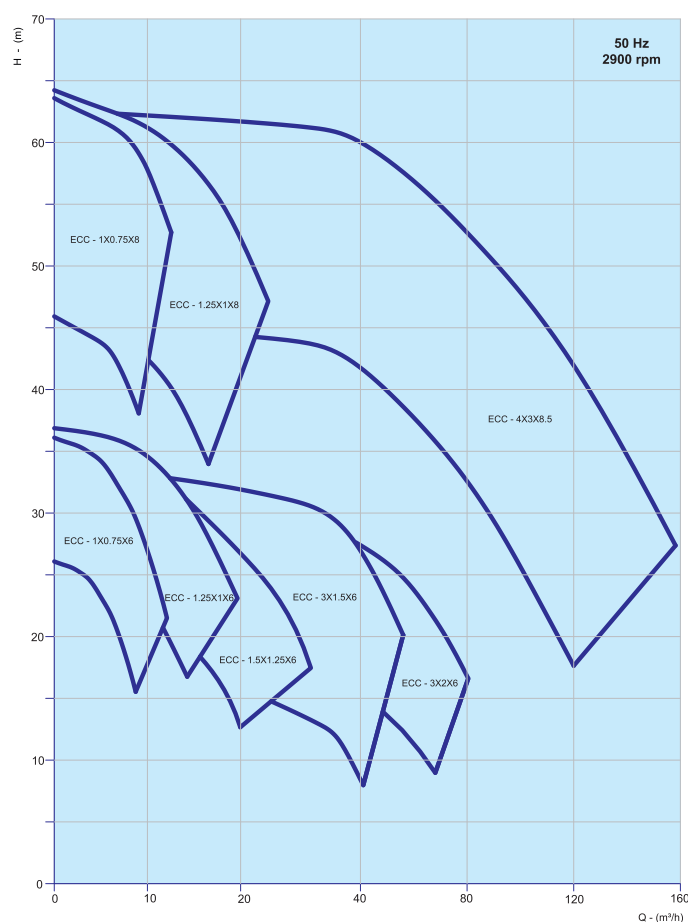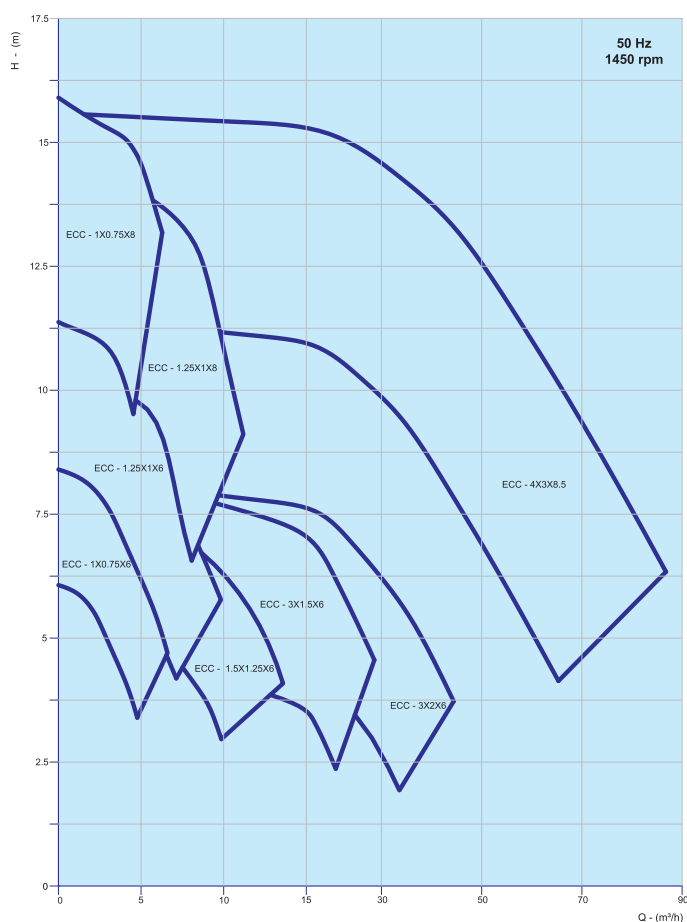

C.R.I. PUMPS PRIVATE LIMITED

Regd. Office : 7/46-1, Keeranatham Road, Saravanampatti,
Coimbatore - 641035. Tamilnadu, INDIA.

Phone : +91-422-7117000/1, Fax : +91-422-7117005.

E-mail : bcsmt@cripumps.com www.crigroups.com

Authorised Dealer :